

Braeburn®

2200NC

Up to 2 Heat / 1 Cool
Conventional and Heat Pump
5-2 Day Programmable Thermostat



ACTUAL SIZE

2 YEAR
LIMITED
WARRANTY

Features

- 5-2 Day Separate Weekend / Weekday Programming
- Bright Blue Display Backlight
- Adjustable Temperature Limits
- Hardwire or Battery Powered
- Permanent Memory Retains Settings
- Filter Check Monitor
- Adjustable Temperature Differentials
- Adaptive Recovery Mode (ARM™)
- F° / C° Switch
- Meets Energy Aware® Guidelines*
- Low Battery Indicator
- Separate O & B Terminals
- Easy Access Front Battery Door
- Auxiliary Heat Status Indicator
- ESD Guard™ Electronic Circuitry
- Compressor Short Cycle Protection
- Temporary Program Override
- Programmable Extended Hold Mode
- Front Access Reset Button
- Mounts to Horizontal Box

**BUILDER
SERIES**


FREE Contractor Branding! Visit braeburnonline.com

*As a licensee in the Energy Aware Programmable Thermostat Program, Braeburn Systems LLC has determined that this product meets the NEMA Energy Aware efficiency specifications for programmable thermostats. Visit www.getenergyaware for more information.

Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)

Braeburn®

Terminal Designations

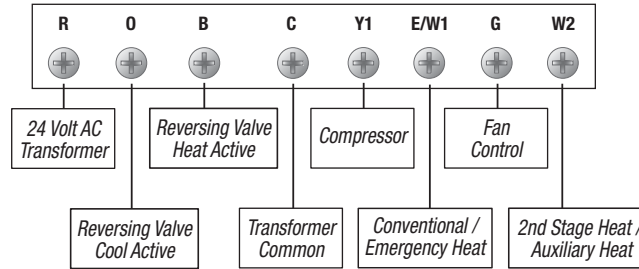

Architectural Specifications

The digital programmable thermostat shall be a Braeburn® model number 2200NC, 3.72" high x 4.75" wide x 1.12" deep, powered independently with either 24 Volt AC or with two "AA" alkaline batteries (3.0 Volt DC). The thermostat shall be compatible with multi-stage conventional or heat pump systems with up to two stages of heating and one stage of cooling. The thermostat shall have a bright blue backlight display, front loading battery door and separate sub-base for trouble free installation. Temperature control range shall be between 45° and 90° F (7° and 32° C), accuracy of +/- 1° F (+/- .5° C), humidity range between 5% and 95% relative humidity. The thermostat shall include non-volatile memory to retain all user and program settings, adjustable temperature limits, filter check monitor, adaptive recovery mode (ARM™), separate heating and cooling set point program times and temperatures, and auxiliary heat indicator. Thermostat shall have low battery indication and a front reset button will return user settings to default values when pressed. The thermostat can be mounted to a horizontal junction box. Meets California Title 24 and Energy Aware® Guidelines.

Product Specifications

Dimensions:	3.72" x 4.75" x 1.12"
Electric Rating:	24 Volt AC (18-30 Volt AC) 1 amp maximum load per terminal 4 amp total maximum load (all terminals)
AC Power:	18-30 Volt AC
DC Power:	3.0 Volts DC (2 "AA" Alkaline batteries included)
Compatibility:	Conventional systems with up to two stages of heating and one stage of cooling; Heat pump systems with one compressor and up to one auxiliary stage; 250mv - 750mv millivolt heating systems
Control Range:	45° to 90° F (7° to 32° C)
Display Range:	40° to 99° F (5° to 37° C)
Accuracy:	+/- 1° F (+/- .5° C)
Temperature Differential:	1st Stage - .5°, 1°, or 2° F (.25°, .5°, or 1° C) 2nd Stage - 2°, 3°, 4°, 5°, or 6° F (1°, 1.5°, 2°, 2.5°, or 3° C)
Storage Temperature:	14° to 140° F (-10° to 60° C)
Operating Humidity:	5% to 95% Relative Humidity
Terminations:	R, O, B, C, Y1, E/W1, G, W2

Shipping Information

INDIVIDUAL CARTON	MASTER CARTON
Dimensions: 3.75" x 5.5" x 1.4"	Quantity: 12
Weight: .45 lbs.	Dimensions: 9" x 4.25" x 11.5"
	Cubic Feet: .25
	Weight: 5.7 lbs.

Braeburn 2200NC Replaces*

Honeywell®	TH2210, T8011, T8024
White-Rodgers®	1F72-151, 1F73-174

*Verify specific application requirements.
All trademarks are the property of their respective owners.

Accessories

2950 Universal Wall Plate (6.5" x 6.5" x .125")
5970 Universal Thermostat Guard

FREE Contractor Branding Available!

Visit our website (www.braeburnonline.com) for more information, contact your local distributor or call our sales department toll-free at 866.268.5599 (U.S.), +1.630.844.1968 (Outside the U.S.).

Date: _____

Engineer: _____

Job Name: _____

Model No.: _____

Location: _____

Submitted By: _____

Contractor: _____

Submitted For Approval: _____ **Record:** _____

Braeburn Systems LLC • 2215 Cornell Avenue • Montgomery, IL 60538 • Toll-Free 866.268.5599 (U.S.) +1.630.844.1968 (Outside the U.S.)